Spec Sheet 4.05

APF Platform
Transport
Platform

www.selectplanthire.com

3,500 kg **3.0 to 7.5**m





APF Large Transport Platform. Please request additional information as this bespoke platform requires. The following data is for advice and special application designs are available upon request.




Direct On Line (DOL)

| CAPACITY | Metric |
|---|----------|
| Payload capacities: Average speed up/down at rated payload: | 3500 kg |
| DOL control | 0,24 m/s |
| Max. lifting height with std. accessories: | 200 m |

| CAR WEIGHT | | |
|-------------------------------------|------------------|--|
| Car weight. Erection crane excluded | 5700 kg | |
| ELECTRICAL DATA | | |
| AC squirrel cage electric motor | 2 + 2 pcs. 11 kW | |
| Power supply | 400V 50Hz | |
| Power supply fuses | 125 A | |
| Power comsumption | 84 kVA | |
| CONTROLS | | |
| Operation: | Cage Operated | |
| Separate power voltage: | 230VAC/110VAC | |
| Control circuit voltage: | 230V AC | |

| DIMENSIONS | |
|---------------------------|-------------|
| Internal width: | 3m to 4.4m |
| Internal length: | 3m to 7.5m |
| Internal min. height: | 3m |
| Local door opening width: | 3.0 to 4.5m |
| Door opening height; | 3.0 to 4.5m |
| Mast section length: | 1.508 m |

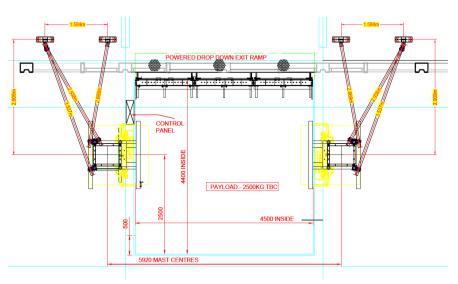

Motor control:

Image is for illustration purposes only. Variations on size and SWI are available upon request.